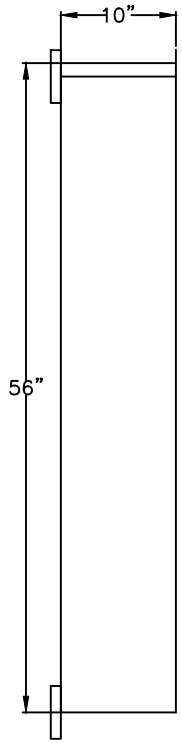

SIDE VIEW
(LESS DOOR)

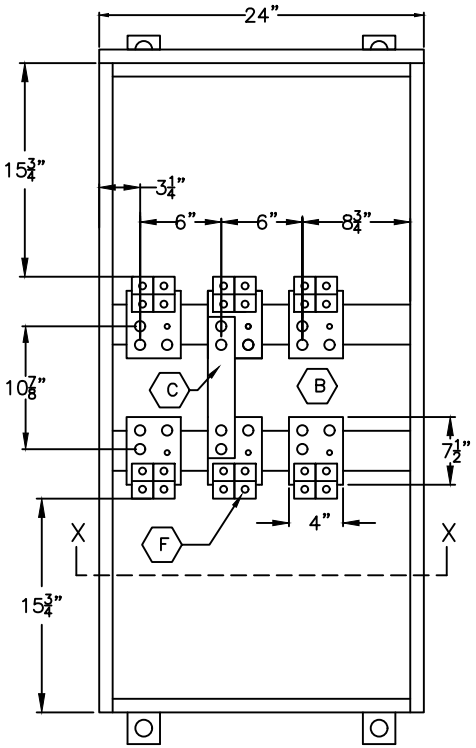

FRONT VIEW
(LESS DOOR)

- (A) METER FITTING, 3ø 3W, C/T RATED, 8 JAW.
- (B) 2–¼"x4"x13–1/2" SILVER PLATED COPPER PHASE DETAILS WITH (2) 750MCM OR (4) 350MCM LUGS
- (C) 2–¼"x4"x13–1/2" SILVER PLATED COPPER NEUTRAL DETAILS WITH (2) 750MCM OR (4) 350MCM LINE & LOAD LUGS
- (D) PADLOCKABLE HANDLE WITH 3–POINT CATCH AND PROVISION FOR 7/16" DIAMETER LOCK
- (E) GLASTIC INSULATORS.
- (F) 2–750MCM PER PHASE & NEUTRAL.

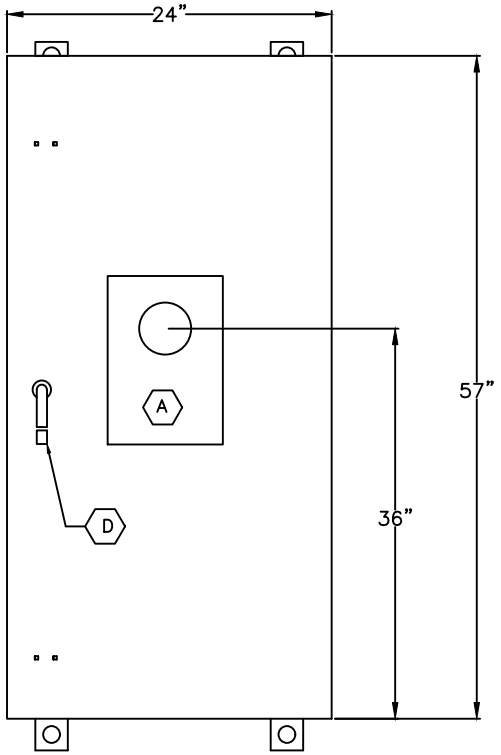

FRONT ENCLOSED
VIEW

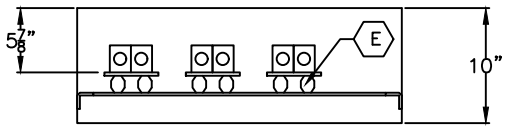

VIEW AT X–X

GENERAL NOTES:
- CURRENT TRANSFORMER METERING CABINET 3ø3W, AS PER COMED REQUIREMENTS AS PER PAGES 172 & 173.
- TYPE 3R OUTDOOR ENCLOSURE.
- ENCLOSURE MADE OF 0.100"+/–0.006" ALUMINUM

PDE POWER DISTRIBUTION EQUIPMENT CO

TITLE: 600A C/T & METER FITTING 3ø3W 65,000A WITHSTAND RATING TYPE 3R	JOB:	CUSTOMER:	REV: 10/31/2017 DATE: 04/26/2016 DWG#: CTMF6033
POWER DISTRIBUTION EQUIPMENT CO, INC. 3010 WILLOW STREET FRANKLIN PARK, IL 60131 PH: (847) 455–2500; FAX: (847) 455–2595			DWN: TS JOB#: NTS PAGE 1 OF 1